



9910-GS40GI Control Unit

- One high pressure relief valve and two 1/2" HB outlets with individual shut-offs.
- 15 GPM max., 580 PSI max.
- Control unit 3 1/2 lbs., remote mounting kit 1 lb.

PART	DESCRIPTION	PRICE (€)
9910-GS40GI	For Hypro 9910-D30 and D50 Pumps	345.20
9910-KIT1741	Remote Mounting Kit	75.10
9910-KIT1757	Repair Kit	110.55



9910-GS50GI Remote Control Unit

- One high pressure relief valve and three 1/2" HB outlets with individual shut-offs.
- 40 GPM max., 725 PSI max.
- Control unit 8 1/2 lbs., remote mounting kit 1 lb.

PART	DESCRIPTION	PRICE (€)
9910-GS50GI	For Hypro 9910-D813, D1064, D1516 and D1554 Pumps	672.65
9910-KIT1742	Remote Mounting Kit	130.40
9910-KIT1732	Repair Kit	164.80



1 1/8 - 6B Male PTO Shaft Kits

PTO(M) shaft adapter, mounting bracket and hardware.

PART	DESCRIPTION	PRICE (€)
9910-KIT1702	For Hypro 9910-D30 Diaphragm Pump	203.40
9910-KIT1706	For Hypro 9910-D50 Diaphragm Pump	252.40
9910-KIT1710	For Hypro 9910-D70 and D115 Diaphragm Pumps	356.65
9910-KIT2200	For Hypro 9910-D503 Diaphragm Pump	183.55



9910-RM40 Control Unit

- One high pressure relief valve and two 1/2" HB outlets with individual shut-offs.
- 24 GPM max., 580 PSI max.
- 3 1/2 lbs., remote mounting kit 2 lbs.

PART	DESCRIPTION	PRICE (€)
9910-RM40	For Hypro 9910-D503 Pump	424.45
9910-KIT1897	Remote Mounting Kit	189.90



9910-VDR50 Control Unit

- Fits 9910-503, D813, D1064.
- Includes gauge, relief valve, bypass lever, two 1/2" HB outlets with shut-offs, and 1" HB bypass.

PART	DESCRIPTION	PRICE (€)
9910-VDR50	Fits 9910-503, D813 and D1064 Pumps	810.30



1" Solid Shafts

PTO(M) shaft adapter, mounting bracket and necessary hardware.

PART	DESCRIPTION	PRICE (€)
9910-KIT1703	For Hypro 9910-D30 Diaphragm Pump	203.40
9910-KIT1707	For Hypro 9910-D50 Diaphragm Pump	252.40
9910-KIT1711	For Hypro 9910-D70 and D115 Diaphragm Pumps	355.60
9910-KIT2202	For Hypro 9910-D503 Diaphragm Pump	183.55



3300-0087 and 3300-0088 Control Units

- One built-in relief valve, three 3/4", 1/2" and 3/8" HB outlets with individual shut-offs.
- 40 GPM max., 290 PSI max.
- 9910-0087 7 lbs., 9910-0088 7 3/4 lbs.
- 3300-0087 does not have quick release lever.

PART	DESCRIPTION	PRICE (€)
3300-0087	For Hypro 9910-D70, D115 and D160 Pumps	672.65
3300-0088	For Hypro 9910-D70, D115 and D160 Pumps	991.75



9910-Kit 1642 Gear Reduction Kit

- For use with standard 8-18 HP gas engine with 1" shaft.
- 6:1 gear box, 8 1/2 lbs.

PART	DESCRIPTION	PRICE (€)
9910-KIT1642	For Hypro 9910-D50, D503, D813 and D1064 Pumps	1001.10



3/4" Gear Reduction - NEW Style

- For D30, D303, and D403 Pumps
- New and improved bolt-through pinion gear to help prevent keyway fretting and seizing.
- Engine mounting flange designed for ease of assembly with standard tools.
- Robust 6:1 gear design increases longevity
- Increased oil capacity
- Made for use on gas engines with 3/4" shaft
- Available pre-assembled on HRGI models



9910-Kit 1994 Control Unit

- Includes one relief valve and two 3/8" HB outlets.
- 1 lb.

PART	DESCRIPTION	PRICE (€)
9910-KIT1994	For Hypro 9910-D12GRGI Pump	172.10



9910-Kit 1640 Gear Reduction Kit

- For use with standard 5 HP gas engine with 3/4" shaft.
- 6:1 gear box, 6 1/2 lbs.

PART	DESCRIPTION	PRICE (€)
9910-KIT1640	For Hypro 9910-D30 Pump	801.95

Diaphragm Pump Repair Kits (not shown)

PART	DESCRIPTION	PRICE (€)
8000-0056	Gear Reduction - New style	760.85

HYPRO®



PSI	350 RPM		400 RPM		450 RPM		500 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
0	14.7	2.2	17.0	2.5	18.2	2.9	19.7	3.5	20.8	3.6
435	13.5	4.1	15.5	4.6	17.3	5.3	19.0	5.9	19.6	6.3
580	13.4	5.3	15.2	6.0	17.1	6.8	18.3	7.6	19.2	8.1
725	13.3	6.4	14.9	7.4	16.9	8.4	17.8	9.3	18.7	9.9

Hypro D813 Diaphragm Pump

- 1 1/4" barb inlet, 3/4" NPT outlet.
- 21 GPM max., 725 PSI max., 550 RPM max., 140°F max.
- 50 lbs.
- Mount to 8-18 HP gas engine.

PART	DESCRIPTION	PRICE (€)
9910-D813	Pump Only	2056.85
9910-D813GRGI	With Gear Reduction, Controls	3520.30



PSI	350 RPM		400 RPM		450 RPM		500 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
0	19.3	0.3	22.1	0.3	24.8	0.4	27.1	0.7	30.1	0.8
145	18.7	1.8	21.4	2.1	24.0	2.4	26.4	2.7	29.0	3.0
217	18.6	2.7	21.2	3.1	23.9	3.5	26.2	3.9	28.8	4.3
290	18.5	3.6	21.1	4.1	23.8	4.5	26.1	5.0	28.7	5.5

Hypro-D115 Diaphragm Pump

- 1 1/2" inlet, 1" outlet.
- Max flow: 30 GPM max., 290 PSI max., 550 RPM, 140°F max.
- 34 lbs.
- For shaft kits see following pages.
- Recommended control unit 3300-0088.

PART	DESCRIPTION	PRICE (€)
9910-D115	Pump Only	1931.10



PSI	350 RPM		400 RPM		450 RPM		500 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
0	27.7	0.7	31.7	0.8	35.7	0.9	38.4	1.3	42.5	1.4
145	25.2	2.5	28.8	2.9	32.4	3.3	35.8	3.9	39.4	4.3
217	24.7	3.7	28.2	4.2	31.7	4.7	35.2	5.3	38.7	5.8
290	24.2	4.5	27.7	5.2	31.2	5.9	34.6	8.7	38.2	7.4

Hypro D160 Diaphragm Pump

- 2" inlet, 1 1/2" outlet.
- 42 GPM max., 290 PSI max., 550 RPM max., 140°F max.
- Weight: 70 lbs.
- 1 3/8" - 6 spline shaft.
- Recommended control unit 3300-0088

PART	DESCRIPTION	PRICE (€)
9910-D160	Pump Only	3421.30



Hypro D1064 Diaphragm Pump

- 1 1/2" hose barb inlet, 3/4" NPT (M) outlet.
- 28 GPM max., 725 PSI max., 550 RPM max., 140°F max.
- 55 lbs.
- 4 semi-hydraulic diaphragms.
- Flanged adapter and 1 3/8"-6B splined shaft.
- Anodized aluminum housing.
- CW and CCW pump shaft rotation.
- Recommended control unit 9910-VDR50 or 9910-GS50GI

PART	DESCRIPTION	PRICE (€)
9910-D1064	Pump Only	2322.75
9910-D1064GRGI	With Gear Reduction, Controls	3895.35




PSI	450 RPM		550 RPM		650 RPM	
	GPM	HP	GPM	HP	GPM	HP
50	4.2	0.33	5.1	0.43	6.0	0.53
100	4.1	0.37	5.0	0.47	5.9	0.57
150	4.0	0.40	4.9	0.50	5.8	0.60
200	3.8	0.50	4.5	0.80	5.3	1.00
290	3.6	0.60	4.5	0.80	5.3	1.00

Hypro D252 Diaphragm Pump

- 3/4" inlet, 1/2" NPT outlet.
- 6 GPM max., 290 PSI max., 650 RPM max., 140°F max.
- 25 lbs.
- Use 3 HP gas engine.
- 9910D252GRGI comes with gear reduction and pressure controls (to be remounted to 3 HP gas engine)

PART	DESCRIPTION	PRICE (€)
9910-D252	Pump Only	927.45
9910-D252GRGI	With Gear Reduction, Controls	1283.00

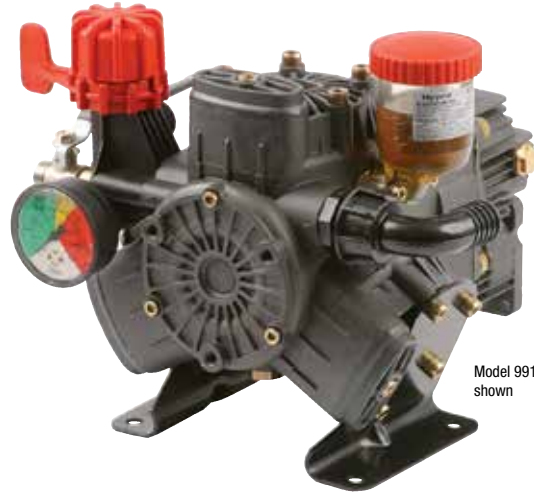

Model 9910-D403GRGI shown

Hypro D403 Diaphragm Pump

- 1" Hose barb inlet, two 1/2" hose barb outlets.
- 3 Diaphragm pump.
- 10.6 GPM max flow.
- 580 PSI max pressure.
- 550 max RPM.
- 140° F max temperature.
- 23 lbs.
- Use 9910-KIT1640 for 3/4" shaft gas engine.

PART	DESCRIPTION	PRICE (€)
9910-D403	Pump Only	1198.70
9910-D403GRGI	With Gear Reduction, Controls	2181.95
9910-GR40	Control Unit Only	413.50



PSI	350 RPM		400 RPM		450 RPM		500 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP	GPM	HP	GPM	HP
145	9.2	1.2	10.6	1.5	11.6	1.8	12.7	2.2	13.7	2.5
285	9.0	2.0	10.3	2.3	11.4	2.8	12.4	3.1	13.5	3.5
430	8.7	2.7	10.0	3.0	11.1	3.5	12.1	4.0	13.2	4.5
580	8.4	3.4	9.8	3.8	10.8	4.4	11.9	4.9	12.9	5.4

Hypro D503 Diaphragm Pump

- 1 1/4" barb inlet, 3/4" NPT outlet.
- 15 GPM max., 580 PSI max., 550 RPM max., 140°F max.
- 28 lbs.
- 3 diaphragm.
- Mounts to 9 HP Honda GX270 engine.

PART	DESCRIPTION	PRICE (€)
9910-D503	Pump Only	1603.40
9910-D503GRGI	With Gear Reduction, Controls	2719.60



PSI	350 RPM		450 RPM		550 RPM	
	GPM	HP	GPM	HP	GPM	HP
50	6.0	0.4	7.9	0.8	9.50	1.6
100	5.9	0.9	7.8	1.3	9.30	2.0
200	5.7	1.3	7.5	1.8	9.10	2.5
300	5.5	1.6	7.4	2.2	9.00	2.8
400	5.3	2.2	7.1	2.8	8.70	3.6
580	5.0	2.7	6.9	3.4	8.45	4.2

Hypro D30 Diaphragm Pump

- 1" inlet, 1/2" barb outlet.
- 9 GPM max, 580 PSI max., 550 RPM max., 140°F max.
- 23 lbs.
- 9910D30GRGI mounts to Honda GX160 5 1/2 HP engine.

PART	DESCRIPTION	PRICE (€)
9910-D30	Pump Only	1132.15
9910-D30GRGI	With Gear Reduction, Controls	2030.15