

Filters TeeJet®

- 1/2", 3/4" Ports
- 100 PSI Maximum
- 100° F Maximum Temp.

To Order: Order filter less screen and appropriate screen separately



PART	DESCRIPTION
1221/2PP-LS	1/2" Poly Filter Less Screen
1223/4PP-LS	3/4" Poly Filter Less Screen
SCREENS	
PART	DESCRIPTION
23174-1	16 Mesh Stainless Steel Screen
23174-2	30 Mesh Stainless Steel Screen
45102-3	50 Mesh Red Poly Screen
45102-4	80 Mesh Blue Poly Screen
45102-5	100 Mesh Green Poly Screen

PARTS

PART	DESCRIPTION
23172PP	Poly Bowl
23173EPR	EPR Bowl Gasket
23173VI	Viton Bowl Gasket

- Poly self cleaning filter

To Order: Order filter less screen and appropriate screen separately



POLY SELF-CLEANING

PART	DESCRIPTION
1263/4PPSC-LS	3/4" Poly Filter Self Cleaning Less Screen
1261PPSC-LS	1" Poly Filter Self Cleaning Less Screen
12611/4NYSC-LS	1 1/4" Poly Filter Self Cleaning Less Screen
12611/2NYSC-LS	1 1/2" Poly Filter Self Cleaning Less Screen
126MLF50SC-LS	50 Series Flange Self Cleaning Less Screen
126MLF75SC-LS	75 Series Flange Self Cleaning Less Screen
SCREENS	
PART	DESCRIPTION
12285-1	16 Mesh Stainless Steel Screen
12285-4	30 Mesh Stainless Steel Screen
12285-2	50 Mesh Stainless Steel Screen
12285-3	80 Mesh Stainless Steel Screen
12285-6	100 Mesh Stainless Steel Screen



MOUNTING LUG

PART	SIZE	GPM
1243/4ALML*	3/4"	23
1241ALML*	1"	34
12411/4ALML*	1-1/4"	60
12411/2ALML*	1-1/2"	70
1242ALML*	2"	160
12421/2ALML*	2-1/2"	170

* Specify mesh size; price includes screen



ALUMINUM SELF-CLEANING

PART	SIZE	MIN. BYPASS REQUIRED
124 3/4ALMLSC-*	3/4" MI Self Clean	6 GPM
124 1ALMLSC-*	1" MI Self Clean	6 GPM
124 1 1/4ALMLSC-*	1 1/2" MI Self Clean	8 GPM
124 1 1/2ALMLSC-*	1 1/2" MI Self Clean	8 GPM

* Specify mesh size; price includes screen

PARTS

ITEM	3/4" & 1"	1-1/4" & 1-1/2"
Bowl	15403-1NY	21035NY
Gasket	7717-2/226VI	12291VI
Inner Cylinder	22408PP	22835NY
Bypass Adapter	22406NY	21034AL
O-Ring for Adapter	7717-2/121 VI	7717-2/135 VI
16 Mesh Screen	12285-1	12290-1
30 Mesh Screen	12285-4	12290-2
50 Mesh Screen	12285-2	12290-3
80 Mesh Screen	12285-3	12290-4
100 Mesh Screen	12285-6	12290-8

ALUMINUM FILTERS

PART	SIZE	GPM
1243/4AL*	3/4"	23
1241AL*	1"	34
12411/4AL*	1-1/4"	60
12411/2AL*	1-1/2"	70
1242AL*	2"	160
12421/2AL*	2-1/2"	170

* Specify mesh size; price includes screen



SCREENS

MESH SIZE	3/4" & 1"	1-1/4" & 1-1/2"	2", 2-1/2"
16	16903-1	15941-1	14634-1
30	16903-3	15941-2	14634-2
50	16903-4	15941-3	14634-3
80	16903-5	15941-4	14634-4
100	16903-6	15941-5	14634-8
120	N/A	15941-6	N/A
200	16903-7	N/A	N/A

NOTE: 14634 Series Screens are all Stainless Steel without Colour Coding

PARTS

ITEM	3/4" & 1"	1-1/4" & 1-1/2"	2", 2-1/2"
Bowl	15403-NY	12288NY	14635NY
Gasket	7717-2/226VI	12291BU	14633BU

Strainers

126 FLUSH-OUT LINE STRAINER

- 200 PSI maximum.
- Polypropylene bowl and head.
- EDPM gasket.
- Removable bottom cap for flush-out.
- May be mounted with M8 or 5/16" bolts.



126ML1-* 126MLF50-*

16903-4

126ML75-*

15941-3



How To Order:


- Order filter less the screen
- Order appropriate screen

PART	DESCRIPTION
126ML3/4-LS	3/4" Nylon Filter less Screen
126ML1-LS	1" Nylon Filter less Screen
126MLF50-LS	50 Series Flange Filter less Screen

SCREENS			
PART	DESCRIPTION	PART	DESCRIPTION
16903-1	16 Mesh Screen	16903-5	80 Mesh Screen
16903-2	20 Mesh Screen	16903-6	100 Mesh Screen
16903-3	30 Mesh Screen	16903-7	200 Mesh Screen
16903-4	50 Mesh Screen		

PARTS – ¾", 1", and 50 Flange Series

50493PP	Strainer Bowl
50494EPR	Strainer Bowl Gasket EPDM
48655PP	Flush-out Cap
63150EPR	Flush-out Cap Gasket

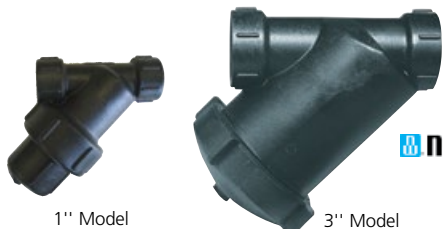

1" Model

3" Model



NORWESCO Y-STRAINERS – ½" TO 3" SIZES

- Body and bowl constructed from glass reinforced poly, EPDM gasket.
- Rated for 70 PSI at 70°F (21°C) – all sizes from ¾" to 3".
- ½" Drain plug on bottom of bowl (3" model only).

How To Order:

- Order filter less the screen
- Order appropriate Mesh screen

PART	DESCRIPTION
YLS050-LS	½" Y-Strainer – Less Screen
YLS075-LS	¾" Y-Strainer – Less Screen
YLS100-LS	1" Y-Strainer – Less Screen
YLS125-LS	1¼" Y-Strainer – Less Screen
YLS150-LS	1½" Y-Strainer – Less Screen
YLS200-LS	2" Y-Strainer – Less Screen
YLS300-LS	3" Y-Strainer – Less Screen

SCREENS	
PART	DESCRIPTION
YLS64177	20 Mesh S.S. Screen for ½" and ¾" Strainer
YLS64178	50 Mesh S.S. Screen for ½" and ¾" Strainer
YLS64179	80 Mesh Screen for ½" and ¾" Strainer
YLS61746	40 Mesh S.S. Screen for 1" and 1¼" Strainer
YLS61747	80 Mesh S.S. Screen for 1" and 1¼" Strainer
YLS61508	20 Mesh S.S. Screen for 1½" and 2" Strainer
YLS64261	50 Mesh S.S. Screen for 1 ½" and 2" Strainer
YLS61510	80 Mesh S.S. Screen for 1½" and 2" Strainer
YLS62249	12 Mesh S.S. Screen for 3" Strainer
YLS62252	20 Mesh S.S. Screen for 3" Strainer
YLS62261	40 Mesh S.S. Screen for 3" Strainer
YLS62400	80 Mesh S.S. Screen for 3" Strainer

126 FLUSH-OUT LINE STRAINER

- 200 PSI maximum.
- Polypropylene bowl and head.
- EDPM gasket.
- Removable bottom cap for flush-out.
- May be mounted with M10 or 3/8" bolts.

How To Order:

- Order filter less the screen
- Order appropriate screen

PART	DESCRIPTION
126ML11/4NY-LS	1 ¼" Nylon Filter less Screen
126ML11/2NY-LS	1 ½" Nylon Filter less Screen
126MLF75-LS	75 Series Flange Filter less Screen

SCREENS			
PART	DESCRIPTION	PART	DESCRIPTION
15941-1	16 Mesh Screen	15941-4	80 Mesh Screen
15941-2	30 Mesh Screen	15941-5	100 Mesh Screen
15941-3	50 Mesh Screen	15941-6	120 Mesh Screen

PARTS – 1 ¼", 1 ½", and 75 Flange Series

48654PP	Strainer Bowl
48656EPR	Strainer Bowl Gasket EPDM
48655PP	Flush-out Cap
63150EPR	Flush-out Cap Gasket



BANJO ½" FEMALE NPT MINI T-STRAINER

- Black poly bowl and HD glass-reinforced poly body, EPDM gasket.
- 316 Stainless Steel Mesh Screen w/ Poly Rib reinforcements.
- Rated at 150 PSI @ 70 PSI at 70°F (21°C).

PART	DESCRIPTION
LSTM050-30	½" Mini T-Strainer – 30 Mesh
LSTM050-50	½" Mini T-Strainer – 50 Mesh
LSTM050-100	½" Mini T-Strainer – 100 Mesh
LSTM050-G	Bowl Gasket - EPDM

HYPRO MINI T-STRAINER W/ 80 MESH SCREEN - COMPLETE

- Unique body features both external ½" Male NPT and ¼" Female NPT.
- Rated at 80 PSI @ 70 PSI at 70°F (21°C).



PART	DESCRIPTION
3350-0082A	80 Mesh Strainer – Complete
3800-0047	80 Mesh Stainless Steel Screen
3351-0036	Filter Bowl
1700-0090	Gasket
3351-0035	Filter Head



POLY "T" LINE STRAINERS

- Heavy-duty glass reinforced polypropylene.
- Clean-out plug.
- 304 stainless steel reinforced screens.
- EPDM gaskets standard. FKM (viton type) available.
- 150 PSI at 70°F.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
LST075-LS	3/4" "T" Filter Less Screen
LST100-LS	1" "T" Filter Less Screen
SCREENS	
PART	DESCRIPTION
LST116	16 Mesh Screen 3/4" & 1" Filter
LST130	30 Mesh Screen 3/4" & 1" Filter
LST150	50 Mesh Screen 3/4" & 1" Filter
LST180	80 Mesh Screen 3/4" & 1" Filter
LST1100	100 Mesh Screen 3/4" & 1" Filter
LST100-G	Gasket 3/4", 1"



LSQ POLY LINE STRAINER

- Precision molded in glass reinforced polypropylene.
- Cam lever configuration for easy access for cleaning and servicing.
- 3/4" plug in cam lever cap for attaching ball valve for draining or back flushing.
- Poly ribbed stainless steel screen.
- EPDM lathe cut gasket.
- FKM (viton type) gaskets available.
- 75 PSI maximum.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
LSQ150-LS	1 1/2" Filter Less Screen
LSQ200-LS	2" Filter Less Screen
SCREENS	
PART	DESCRIPTION
LS2-30	30 Mesh Screen for 1 1/2", 2"
LS2-50	50 Mesh Screen for 1 1/2", 2"
LS2-80	80 Mesh Screen for 1 1/2", 2"
LS2-100	100 Mesh Screen for 1 1/2", 2"
LSQ200-G	EPDM Gasket 1 1/2", 2"

* Note: 6, 12, and 20 Mesh Screens Special Order



POLY "Y" LINE STRAINERS

- Heavy-duty glass reinforced polypropylene.
- Clean-out plug.
- 304 stainless steel reinforced screens.
- EPDM gaskets standard. FKM (viton type) available.
- 150 PSI at 70°F.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
LST125-LS	1 1/4" Filter Less Screen
LST150-LS	1 1/2" Filter Less Screen
SCREENS	
PART	DESCRIPTION
LST1516	16 Mesh Screen for 1 1/4", 1 1/2"
LST1530	30 Mesh Screen for 1 1/4", 1 1/2"
LST1550	50 Mesh Screen for 1 1/4", 1 1/2"
LST1580	80 Mesh Screen for 1 1/4", 1 1/2"
LST15100	100 Mesh Screen for 1 1/4", 1 1/2"
LST150-G	EPDM Gasket



POLY "Y" STRAINERS

- Precision molded construction.
- Corrosion resistant.
- Lightweight.
- Fiberglass reinforced.
- Easy grip end cap.
- Poly ribbed 316 stainless steel screen.
- EPDM gaskets FKM (viton type) available.
- Heavy-duty end cap threads.
- 1/2" - 1 1/4" 75 PSI maximum.
- 1 1/2" - 2" 150 PSI maximum.
- Clean-out plug.
- Female NPT x Female NPT.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
LS050-LS	1/2" "Y" Strainer Less Screen
LS075-LS	3/4" "Y" Strainer Less Screen
LS100-LS	1" "Y" Strainer Less Screen
LS125-LS	1 1/4" "Y" Strainer Less Screen
LS150-LS	1 1/2" "Y" Strainer Less Screen
LS200-LS	2" "Y" Strainer Less Screen
SCREENS	
PART	DESCRIPTION
LS7**	20, 40 or 80 Mesh Screen for 1/2", 3/4"
LS1**	20, 40 or 80 Mesh Screen for 1", 1 1/4"
LS2-***	20, 30, 50, 80, 100, 120 Screen for 1 1/2", 2"
LS075-G	EPDM Gasket for 1/2", 3/4"
LS100-G	EPDM Gasket for 1", 1 1/4"
LS150-G	EPDM Gasket for 1 1/2", 2"




MANIFOLD LINE STRAINER

- EPDM gaskets.
- 316 stainless steel screens.
- 150 PSI maximum.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
MLS200-LS	2" Standard Port Filter Less Screen
SCREENS	
PART	DESCRIPTION
LS2-20	20 Mesh Stainless Steel Screen
LS2-30	30 Mesh Stainless Steel Screen
LS2-50	50 Mesh Stainless Steel Screen
LS2-80	80 Mesh Stainless Steel Screen
LS2-120	120 Mesh Stainless Steel Screen
LS150-G	Gasket

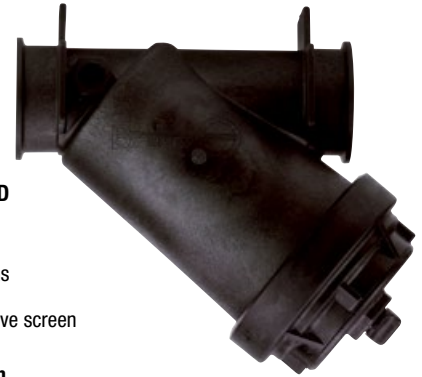

3" THREADED & MANIFOLD LINE STRAINER

- EPDM gaskets
- 304 Stainless Steel screens
- 75 PSI maximum
- Threaded end cap to remove screen

How To Order:

- Order filter less the screen.
- Order appropriate screen required.

PART	DESCRIPTION
LSM300-LS	3" Threaded Strainer less Screen
MLS300-LS	3" Manifold Strainer less Screen
SCREENS	
PART	DESCRIPTION
LS304	4 Mesh Stainless Steel Screen
LS308	8 Mesh Stainless Steel Screen
LS312	12 Mesh Stainless Steel Screen
LS320	20 Mesh Stainless Steel Screen
LS350	50 Mesh Stainless Steel Screen
MLS300G	Gasket



MANIFOLD LINE STRAINER

- EPDM gaskets.
- 316 stainless steel screens.
- 150 PSI maximum.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
MLS222-LS	2" Full Port Manifold Filter Less Screen
SCREENS	
PART	DESCRIPTION
LST204SS	4 Mesh Stainless Steel Screen
LST206SS	6 Mesh Stainless Steel Screen
LST208SS	8 Mesh Stainless Steel Screen
LST210SS	10 Mesh Stainless Steel Screen
LST216SS	16 Mesh Stainless Steel Screen
LST230SS	30 Mesh Stainless Steel Screen
LST250SS	50 Mesh Stainless Steel Screen
LST280SS	80 Mesh Stainless Steel Screen
LST2100SS	100 Mesh Stainless Steel Screen
MLS220-G1	EPDM Gasket for Body



MANIFOLD LINE STRAINER

- EPDM gaskets.
- 150 PSI maximum.
- Screens are poly cage w/ stainless steel mesh.

How To Order:

- Order filter less the screen.
- Order appropriate screen.

PART	DESCRIPTION
MLST100-LS	1" Manifold Filter LESS Screen
MLST150-LS	2" Manifold Filter LESS Screen
SCREENS	
PART	DESCRIPTION
LST116	16 Mesh Screen for MLST100 Filter
LST130	30 Mesh Screen for MLST100 Filter
LST150	50 Mesh Screen for MLST100 Filter
LST180	80 Mesh Screen for MLST100 Filter
LST1100	100 Mesh Screen for MLST100 Filter
LST1516	16 Mesh Screen for MLST150 Filter
LST1530	30 Mesh Screen for MLST150 Filter
LST1550	50 Mesh Screen for MLST150 Filter
LST1580	80 Mesh Screen for MLST150 Filter
LST15100	100 Mesh Screen for MLST150 Filter
LST100-G	Gasket for MLST100 Filter EPDM
LST150-G	Gasket for MLST150 Filter EPDM

Gas Engine Powered Pumps



2" HIGH PRESSURE/FIREFIGHTING PUMP W/ POWEREASE 210CC ENGINE

- 2" male NPT inlet and outlet ports.
- Aluminum impeller and casing.
- 126 GPM maximum flow, 85 PSI Outlet Pressure.
- 26' suction lift, 197' total lift.
- Powerease engine features 3.6 litre fuel tank, recoil start, and low oil shutdown protection.

PART	DESCRIPTION
HP-2070R	2" HP Pump w/ Powerease



2" HIGH PRESSURE PUMP W/ HONDA GX390 ENGINE

- 2" male NPT inlet and outlet ports.
- Heavy Duty Aluminum impeller & Aluminum casing.
- 140 GPM maximum flow; 145 PSI Outlet Pressure.
- 26' Suction lift, 330' total lift.
- Honda GX390 (389cc) engine features recoil start, low oil alert, and 6.8L (1.8 USG) fuel tank capacity.

PART	DESCRIPTION
HP-2013HR	2" HP Pump w/ Honda



2" SEMI-TRASH PUMP W/ HONDA GX200 ENGINE

- 2" male NPT inlet and outlet ports.
- 125 GPM maximum flow.
- 26' suction lift, 82' total lift.
- Handles up to 5/8" solids.
- Honda 196cc engine features 3.1 litre fuel tank, recoil start, and low oil alert.

PART	DESCRIPTION
TP-2065HT	2" Semi-Trash Pump w/ Honda



SUCTION HOSE ASSEMBLY – "C" CAMLOCK X MNPT

Our standard, general-purpose PVC suction hose. It is flexible, lightweight, non-marking, and resistant to mild chemical solutions. Assemblies come with a "C" Female Cam-lock and galvanized MNPT nipple.

- 20-foot hose length.
- Fittings secured with double band clamps.

PART	DESCRIPTION
PVCS112CM20	1½" Suction Hose Assembly
PVCS2CM20	2" Suction Hose Assembly
PVCS3CM20	3" Suction Hose Assembly
PVCS4CM20	4" Suction Hose Assembly
PVCS6CM20	6" Suction Hose Assembly



HEAVY DUTY BRONZE FOOT VALVE

- Includes perforated stainless-steel strainer.

PART	DESCRIPTION
FV100	Bronze Foot Valve 1" FNPT
FV112	Bronze Foot Valve 1½" FNPT
FV200	Bronze Foot Valve 2" FNPT
FV300	Bronze Foot Valve 3" FNPT
FV400	Bronze Foot Valve 4" FNPT

Other sizes available; please inquire.



3" SEMI-TRASH PUMP W/ HONDA GX200 ENGINE

- 3" male NPT inlet and outlet ports.
- 264 GPM maximum flow.
- 26' suction lift, 85' total lift.
- Handles up to 1" solids.
- Honda 196cc engine features 3.1 litre fuel tank, recoil start, and low oil alert.

PART	DESCRIPTION
TP-3065HR	3" Semi-Trash Pump w/ Honda



LAY-FLAT HOSE ASSEMBLY – "C" & "E" CAMLOCKS

Assemblies are lightweight, economical PVC hoses that flatten and roll up tightly when not in use. designed for applications where external abuse is limited. Used widely for irrigation, construction, flood protection, and municipal applications.

- Assemblies are supplied with female "C" and male "E" aluminum cam-locks.
- Fittings secured with double band clamps.
- Available in 50-foot and 100-foot lengths.

PART	DESCRIPTION
PVCL112CE50	1½" x 50' Lay-flat Assembly
PVCL2CE50	2" x 50' Lay-flat Assembly
PVCL3CE50	3" x 50' Lay-flat Assembly
PVCL4CE50	4" x 50' Lay-flat Assembly
PVCL6CE50	6" x 50' Lay-flat Assembly
PVCL112CE100	1½" x 100' Lay-flat Assembly
PVCL2CE100	2" x 100' Lay-flat Assembly
PVCL3CE100	3" x 100' Lay-flat Assembly
PVCL4CE100	4" x 100' Lay-flat Assembly
PVCL6CE100	6" x 100' Lay-flat Assembly



PVC FOOT VALVES

PART	DESCRIPTION
FVPVC1000	PVC Foot Valve 1" FNPT
FVPVC1500	PVC Foot Valve 1½" FNPT
FVPVC2000	PVC Foot Valve 2" FNPT
FVPVC3000	PVC Foot Valve 3" FNPT

Other sizes available; please inquire.



4" TRASH PUMP W/ POWEREASE 420CC ENGINE

- 4" male NPT inlet and outlet ports.
- Cast Iron impeller and aluminum casing.
- 580 GPM max. flow; 26' suction lift, 95' total lift.
- Handles up to 1" solids.
- Powerease engine features 3.6 litre fuel tank, recoil start, and low oil shutdown protection.

PART	DESCRIPTION
TP-4015RM	4" Trash Pump w/ Powerease